GLASS PARTICLE DEPOSITED BODY MANUFACTURING METH Application No.: 10/511,547 Any. Docket No.: 049677-0160 Inventor: Toshihiro OOISHI, et al.

FIG. 1


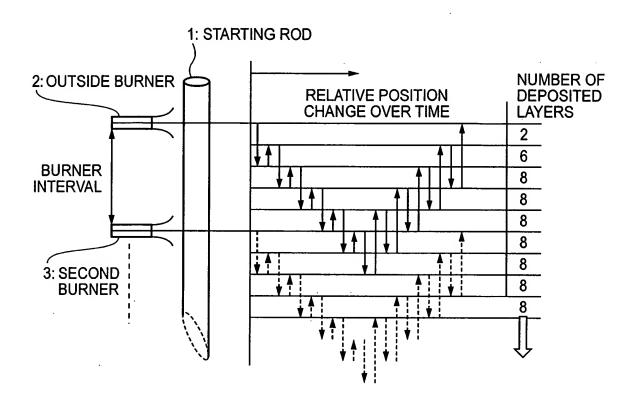


FIG. 2

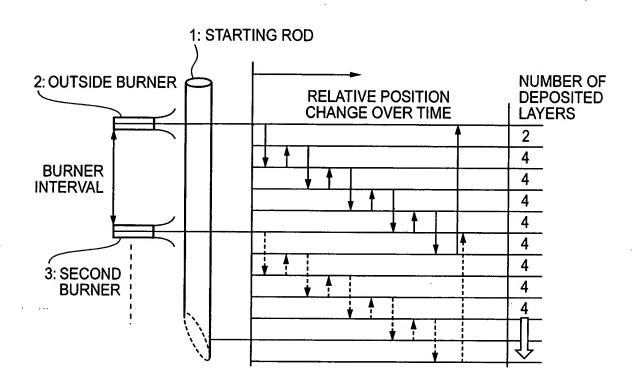


LASS PARTICLE DEPOSITED BODY MANUFACTURING METHO Application No.:10/511,547 Aity, Docket No.: 049677-0160 Inventor: Toshihiro OOISHI, et al.

3/7

FIG. 3

1: STARTING ROD

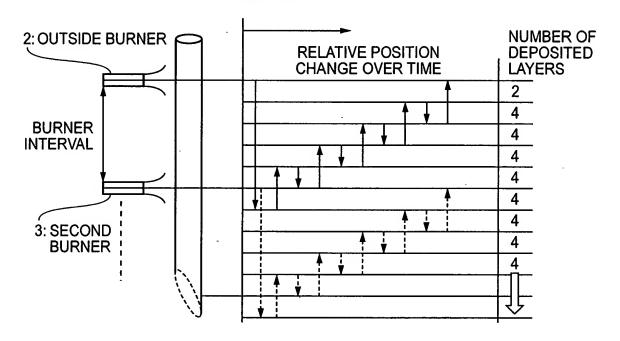

SLASS PARTICLE DEPOSITED BODY MANUFACTURING METH. Application No.: 10/511.547

2017 SAT

Application No.:10/511,547 Atty. Docket No.: 049677-0160 Inventor: Toshihiro OOISHI, et al.



FIG. 4 (a)


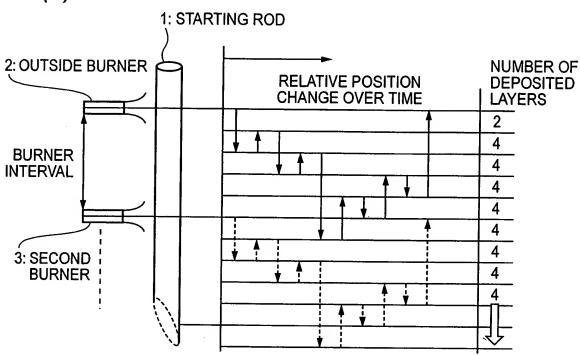


FIG. 4 (b)

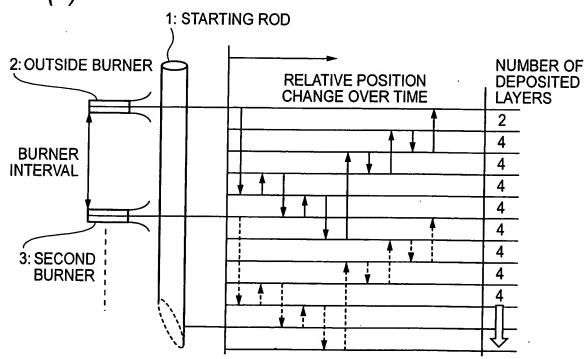

Application No.:10/511,547
Atty. Docket No.: 049677-0160
Inventor: Toshihiro OOISHI, et al.

5/7

FIG. 5

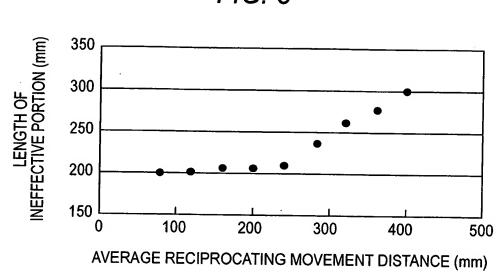


FIG. 6

FIG. 6

WELLECTIVE FORTION (mm) 350

250

0

150

100

200

300


400

500

AVERAGE RECIPROCATING MOVEMENT DISTANCE (mm)

Application No.: 10/511,547
Atty. Docket No.: 042677-0160
Inventor: Toshihiro OOISHI, et al.

FIG. 7

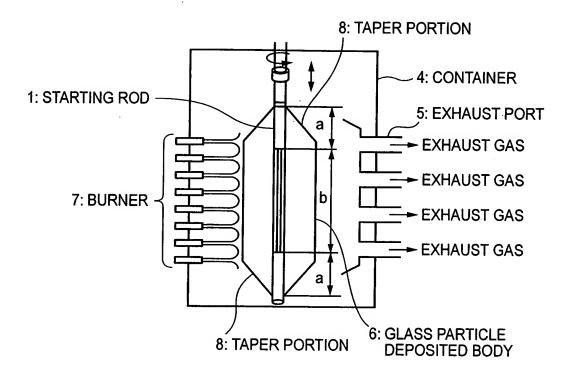

GLASS PARTICLE DEPOSITED BODY MANUFACTURING METH Application No.: 10/511,547 Atty. Docket No.: 049677-0160 Inventor: Toshihiro OOISHI, et al.

FIG. 8

